



## 1764150WW70D | silver

176

Industrial luminaire

LED | 150 W 3000 K

LED

DALI



IP65



CE



5Y

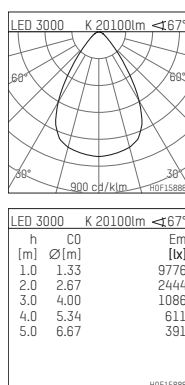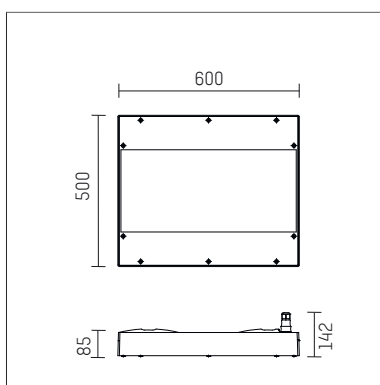


- Industrial luminaire 176
- for ceiling mounting and pendant installation
- mounting devices must be ordered separately
- with LED 23600 lm
- colour temperature: 3000 K
- colour rendering index: CRI >70
- L90 / B10 (100.000 / ta 25°C)
- SDCM < 3
- net luminous flux: 20100 lm
- total load: 150 W
- luminous efficacy: 134,0 lm/W
- symmetrical light distribution, wide flood
- beam angle: 65 °
- UGR: 21
- with two integrated power units, electronic (DALI), 220-240 V, 0/50/60 Hz
- dimmable 10-100%
- Number of luminaires per fuse (B16): 5
- power supply: plug connector 5x2,5 mm²
- Optional loop-in loop-out cabling
- housing of die cast aluminium
- safety glass, clear
- with PC cover available on request
- length: 600 mm, width: 500 mm, height: 142 mm
- windage area: 0,30 m²
- weight: 18,6 kg
- protection rating: IP65 (IP66 available on request)
- protection class I
- 5 years Hoffmeister warranty
- Designed and manufactured in Germany
- minimum ambient temperature: -40 ° C
- maximum ambient temperature: 45 ° C
- impact resistance class: IK06
- certificates: manufactured according to DIN VDE 0711 / EN 60598, CE, proof against ball impact
- colour: silver (RAL9006)
- 1764150WW70D

- Overview of accessories on the following page / s

1764150WW70D  
accessory

Required accessories

| description accessory general                                                   | dimensions in mm | item number | pic.-No. |
|---------------------------------------------------------------------------------|------------------|-------------|----------|
| Ceiling fixation<br>for series 176                                              |                  | 817600200   | 01       |
| Pivoting bracket, for wall and ceiling mounting<br>Ball-proof<br>for series 176 |                  | 817600300   | 02       |
| Steelwire suspension, 2xY-FIT, 2x4m<br>for series 176                           |                  | 817600100   | 03       |



Optional accessories

| description accessory general                                                                                            | dimensions in mm | item number | pic.-No. |
|--------------------------------------------------------------------------------------------------------------------------|------------------|-------------|----------|
| plug connection, RST20i5 for double connection<br>5-pole, 20 A<br>cable diameter 10-14mm with cross section max. 1,5 mm² |                  | 817600400   | 01       |

