



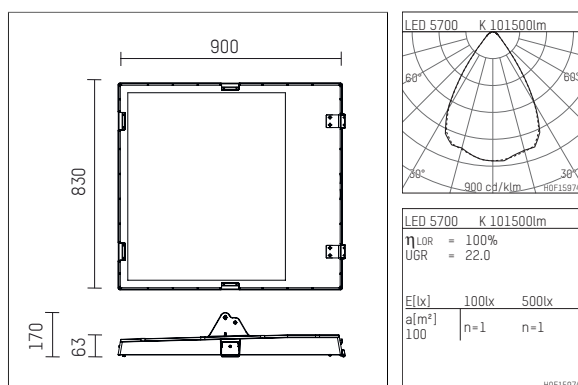

## 1774750KW70D | unpainted aluminium

177 | 2.0  
Arealflooder  
LED | 750 W 5700 K



- Arealflooder 177 2.0
- for surface mounted installation on wall or ceiling
- mounting bracket must be ordered separately
- with LED 124000 lm
- colour temperature: 5700 K
- colour rendering index: CRI >70
- L90 / B10 (100.000 / ta 25°C)
- net luminous flux: 101500 lm
- total load: 750 W
- luminous efficacy: 135,3 lm/W
- symmetrical light distribution, wide flood
- beam angle: 65 °
- 4 integrated LED power units, electronic (DALI), 220-240 V, 0/50/60 Hz
- overvoltage protection 10kV; discharge current 5kA
- dimmable 10-100%
- Number of luminaires per fuse (B16): 1
- power supply: plug connector 5x2,5 mm²
- optional loop-in loop-out cabling
- housing of aluminium and die cast aluminium
- safety glass, clear
- length: 900 mm, width: 830 mm, height: 170 mm
- windage area: 0,75 m²
- weight: 38,9 kg
- protection rating: IP65
- protection class I
- 5 years Hoffmeister warranty
- designed and manufactured in Germany
- minimum ambient temperature: -40 °C
- maximum ambient temperature: 40 °C
- certificates: manufactured according to DIN VDE 0711 / EN 60598
- colour: unpainted aluminium
- 1774750KW70D

- Overview of accessories on the following page / s

1774750KW70D  
accessory

Required accessories

| description accessory general                         | dimensions in mm | item number | pic.-No. |
|-------------------------------------------------------|------------------|-------------|----------|
| Ceiling fixation<br>for series 177                    |                  | 817700200   | 01       |
| Mounting bracket, traverse mounting<br>for series 177 |                  | 817700300   | 02       |
| Mounting bracket, for wall mounting                   |                  | 817700400   | 03       |

